



SIDE DUMP EVOLUTION

Durability, Versatility, Reliability.... For ANY Load!

One of the MOST Stable Trailers on the Market Today!

No Center Divider, Trunnion Mounted Inverted Cylinder & External Supports provide for unprecedented stability!

Angled Internal Tub Corner

- No 90° Corners -
- Improves Load Release -

Blasted Paint Preparation

1/4" AR400 Rounded Tub


No Center Divider
- Haul What You Want -

PATENT PENDING

Trunnion Mounted
Cylinder Design

2 Ply Rubber Fender
- 8° Slope, Flexible Edge -

Heavy Duty
Push Block

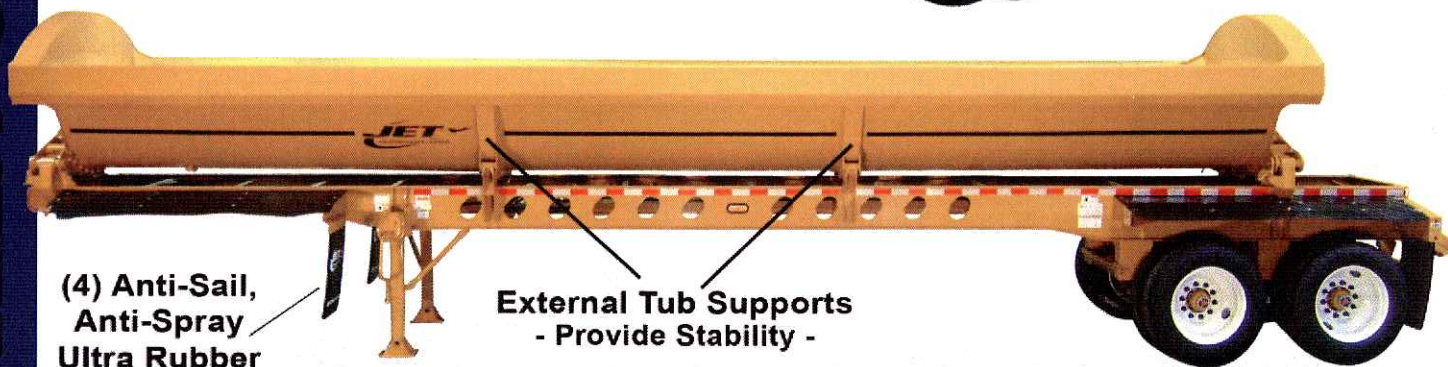

(4) Anti-Sail,
Anti-Spray
Ultra Rubber
Mud Flaps

External Tub Supports
- Provide Stability -



Quality You Can Count On.... Experience You Trust!

Ideal for Construction, Commercial & Agricultural Use

Large Tub Siderail Maximizes Strength

Self-Lubricating Tub Pivot Bushings Reduce Maintenance

Long Lasting LED Lights with Sealed Wire Harness

Round Bottom Tub



External Tub Supports (No Center Divider)

Blasted Paint Preparation for Maximum Paint Adhesion

AR400 Steel Tub

Durable Chip Resistant Primer & Polyurethane Full Gloss Paint

TRAILER SPECIFICATIONS

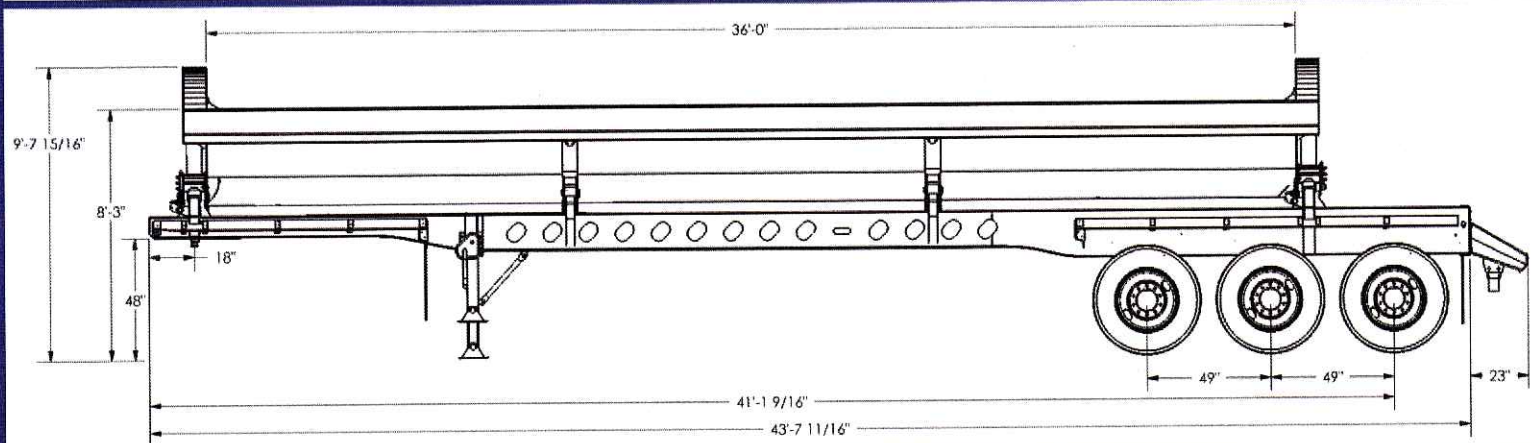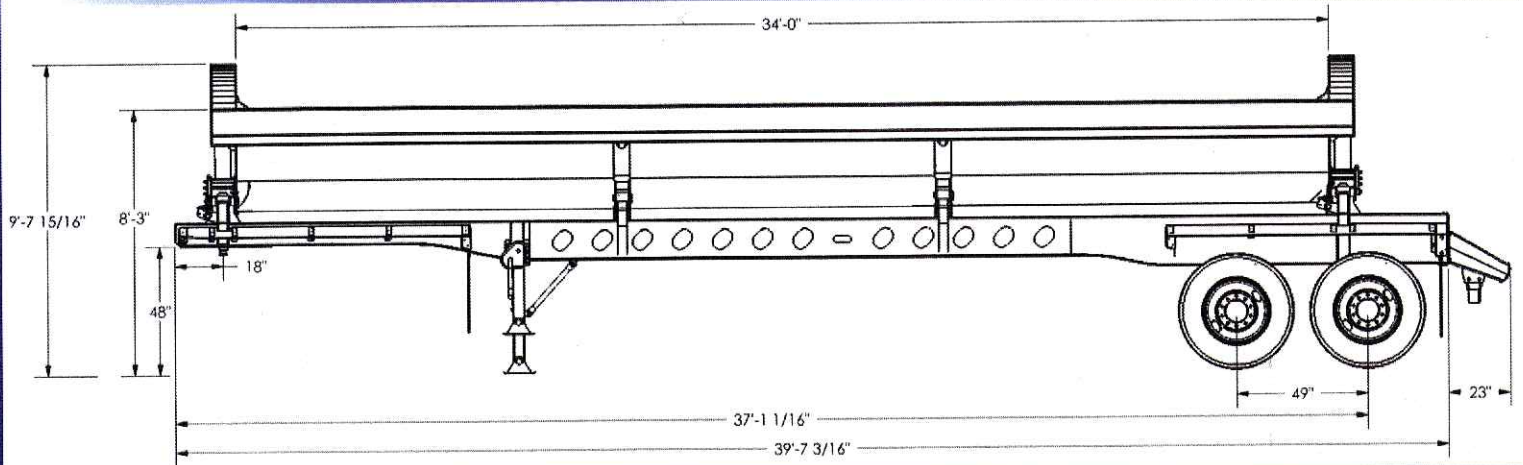

Frame Length: 39' 7 3/16"
Tub Length: 34'
Width: 102'
Height: 8'3" Tub Side
 9' 7 15/16" at Tub Center
Tub Capacities
 34' Tub: 21 Cubic Yards Waterfull
 31 Cubic Yards Heaping
 36' Tub: 22 Cubic Yards Waterfull
 33 Cubic Yards Heaping
Tub Construction: 1/4" Thick AR400 Steel
 Rounded Tub
 No Center Divider
 Angled Internal Corners
Frame Construction: High Strength Fabricated Steel I-Beam
 2 Speed Landing Leg
Bumper: Bolt-On Push Bumper
Tub Pivots: Self-Aligning, Self-Lubricated,
 Maintenance Free Bushings
 Fully Enclosed Flip Up Pivot Latches
 Plated Pivot Pins
Hydraulics: 5" Diameter Bore Cylinders
 3000psi Rated Hydraulic Components
 Proportional Flow Divider

Suspension: Air Ride (23,000# rated) Standard
Axles: Hub Pilot Greased Axles
 Axle Beam Rated at 25,000#
Wheels: 8.25 x 22.5 Steel (8)
Tires: 11R22.5 Radials (8)
Brakes: 16 1/2" x 7"
 2S1M Anti-lock Brake System
Fenders: Bolt on Front and Rear 2 Ply Rubber
 Flexible Edge
 Sloped to Release Debris
Mudflaps: Ultra Rubber with JET logo (front & rear)
Electric: LED Low Profile/High Impact Lights
 Sealed Lights/Wire Harness
Paint: Yellow Tub; Yellow Frame
 (other color options available)
Options: 36' Tub Length
 Triple Axle
 Lift Axle
 Electric Tarp System
 8.25 x 24.5 Steel Wheels
 11R24.5 Radial Tires
 Aluminum Wheels
 Trailer Mounted Directional Control Valve

Part #031610

*2 Directional Hydraulics Required for Operation / 25-30 GPM / 2200 - 2500 PSI



SPENCER, IA
800-242-5030

DES MOINES, IA
800-262-5030

www.vanderhaags.com

SIOUX FALLS, SD
800-274-5030

COUNCIL BLUFFS, IA
888-323-5030



Vander Haag's, Inc