

Hydraulic Detachable Gooseneck 35 Ton & 51 Ton Series



Performance Features *(standard on both series)*

Front Loading ramps with tapered front and traction bars

D-rings are approximately 6' centers on lower deck on web of outer rail

Chain ties are approximately 3' centers on outer rail on lower deck

Decking: 1 7/8" apitong in the track area

Tool box located in front of lower deck between main beams (no lid) - approx. 32"W x 43"L x 10" D

25,000 lb. Axles with ABS

9" Air ride suspension

Liquid-filled air gauge in enclosure

4 Flag holders on front lower deck and rear of trailer

Manual raise and lower valve

10-hole Steel disc wheels, Tires: 255/70R 22.5

Anti-sail mud flaps on neck and rear deck

Type 30/30 spring parking brake

Sealed wire harness with internal ground

LED lights including side turn signal and license lamp

3 Tail lights per side

Finish is a steel grit blast, wash, iron phosphate coating, epoxy primer with polyurethane top coat

Slate gray paint (optional colors available)

Detachable Gooseneck Advantages

EASY TO LOAD & UNLOAD
from the detachable lower deck

HAUL BIG LOADS
that are Extra tall, Extra wide

ALLOWS for SAFER LOADING
than a drop deck trailer

34' DECK ON 35 TON TANDEM
or 30' Deck on 35 Ton triple

Distinct Features

Capacity in 15'

Overall width

Swing Clearance

King pin height

35 Ton

70,000 lb.

102"

85 1/2"

48"

51 Ton

102,000 lb.

102"

108"

50"

1303 N 13th St
Humboldt, IA 50548
515-332-3117


Fax: 515-332-5092
Email: jet@jetcompany.com
Website: www.jetcompany.com



35 Ton Series


51 Ton Series

49' RGS4902A25635 - 2 Axle

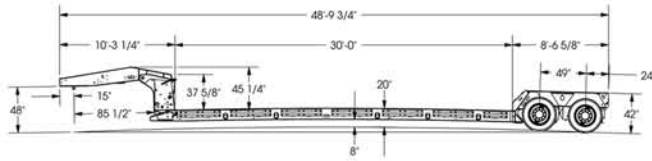


Deck Length 30'
Rear length w/Slant 8'-6"
Neck Length w/15" Pin 10'-4"
Main Frame 12", 100,000 psi
Side Rails 12", 100,000 psi
Axles Tandem on 49" centers
(34,000 lbs max legal axle load)

48' RGS4802A746512 - 3 Axle

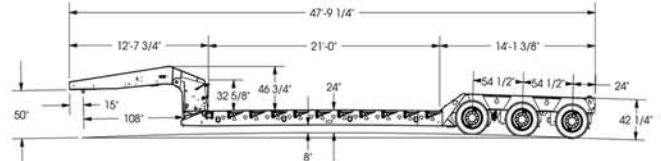


Deck Length 21'
Rear length w/Slant 14'-3"
Neck Length w/15" Pin 12'-7"
Main Frame 16", 100,000 psi
Side Rails 16", 100,000 psi
Axles Triple on 54 1/2" centers
(42,500 lbs max legal axle load)

53' RGS5302A259350 - 2 Axle




Deck Length 34'
Rear length w/Slant 8'-6"
Neck Length w/15" Pin 10'-4"
Main Frame 13 1/2", 100,000 psi
Side Rails 13 1/2", 100,000 psi
Axles Tandem on 49" centers,
(34,000 lbs max legal axle load)

53' RGS5302A746512 - 3 Axle




Deck Length 26'
Rear length w/Slant 14'-3"
Neck Length w/15" Pin 12'-7"
Main Frame 16", 100,000 psi
Side Rails 16", 100,000 psi
Axles Triple on 54 1/2" centers
(42,500 lbs max legal axle load)

53' RGS5302A456350 - 3 Axle

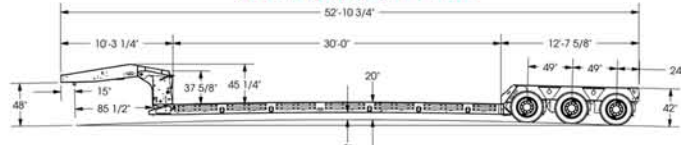

Deck Length 30'
Rear length w/Slant 12'-7"
Neck Length w/15" Pin 10'-4"
Main Frame 12", 100,000 psi
Side Rails 12", 100,000 psi
Axles Triple on 49" centers,
(42,000 lbs max legal axle load)

53' RGS5302A846512 - 4 Axle

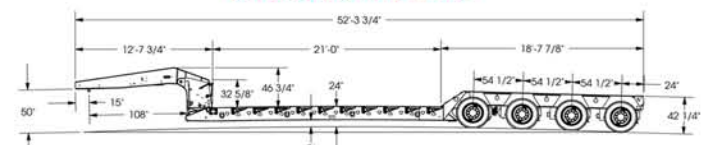

Deck Length 21'
Rear length w/Slant 18'-9"
Neck Length w/15" Pin 12'-7"
Main Frame 16", 100,000 psi
Side Rails 16", 100,000 psi
Axles Quad on 54 1/2" centers
(51,500 lbs max legal axle load)

Additional Features

35 Ton Series

51 Ton Series

Deck Height Range (Loaded)	Front 6" - Range 16"-22" Rear 3" - Range 18 1/2" - 21 1/2"	Front 8" - Range 18 1/2" - 26 1/2" Rear 3" - Range 22 1/2" 25 1/2"
Rear Deck Height	42" loaded, 9" ride height	42" loaded, 9" ride height
Ground Clearance	8"	8"
Main Beams	1/4" web, neck 1/2" X 8" flange, rear 5/8" x 6" flange Deck 3/4" X 8" flange, Flanges are 100,000 psi yield	1/4" web, neck 5/8" X 8" flange, rear 3/4" x 8" flange Deck 3/4" X 8" flange, Flanges are 100,000 psi yield
Side Rails	1/4" web, 1/2" X 6" flange	1/4" web, 1/2" X 6" flange
Crossmembers	M8 X 6.5 lb. on 24" centers with 4" I-beam in between on outside sections only	M10 X 9 lb. on 24" centers with 4" I-beam in between on outside sections only
Hydraulics	Cylinders; Lift 6" X 10", Gooseneck 3" X 12" Valves- 2 spool.	Cylinders; Lift 8" X 8", Gooseneck 3" X 12" Valves- 2 spool.
Slide Outs (optional)	Standard Aluminum Slide Outs* 7600# @ 14' = 33" out 9200# @ 13' = 27" out 11500# @ 12' = 21" out Double for axle load Only Available on 35 Ton*	Heavy Duty Aluminum Slide Outs** 10000# @ 14' = 33" out 12000# @ 13' = 27" out 15000# @ 12' = 21" out Double for axle load Available on 35 Ton & 51 Ton**

Other trailers Jet Company manufactures: Grain Hopper (steel & aluminum), Flatbed, Drop Deck, Side Dump, Pup and Dollies.

Notice: All dimensions, specifications and pictures contained in this literature are based on the latest product information available at that time. To insure product improvement, Jet Company reserves the right to make any changes or discontinue models without notice. Jet trailers conform to all DOT regulations in effect at the time of manufacture.

Part#062017